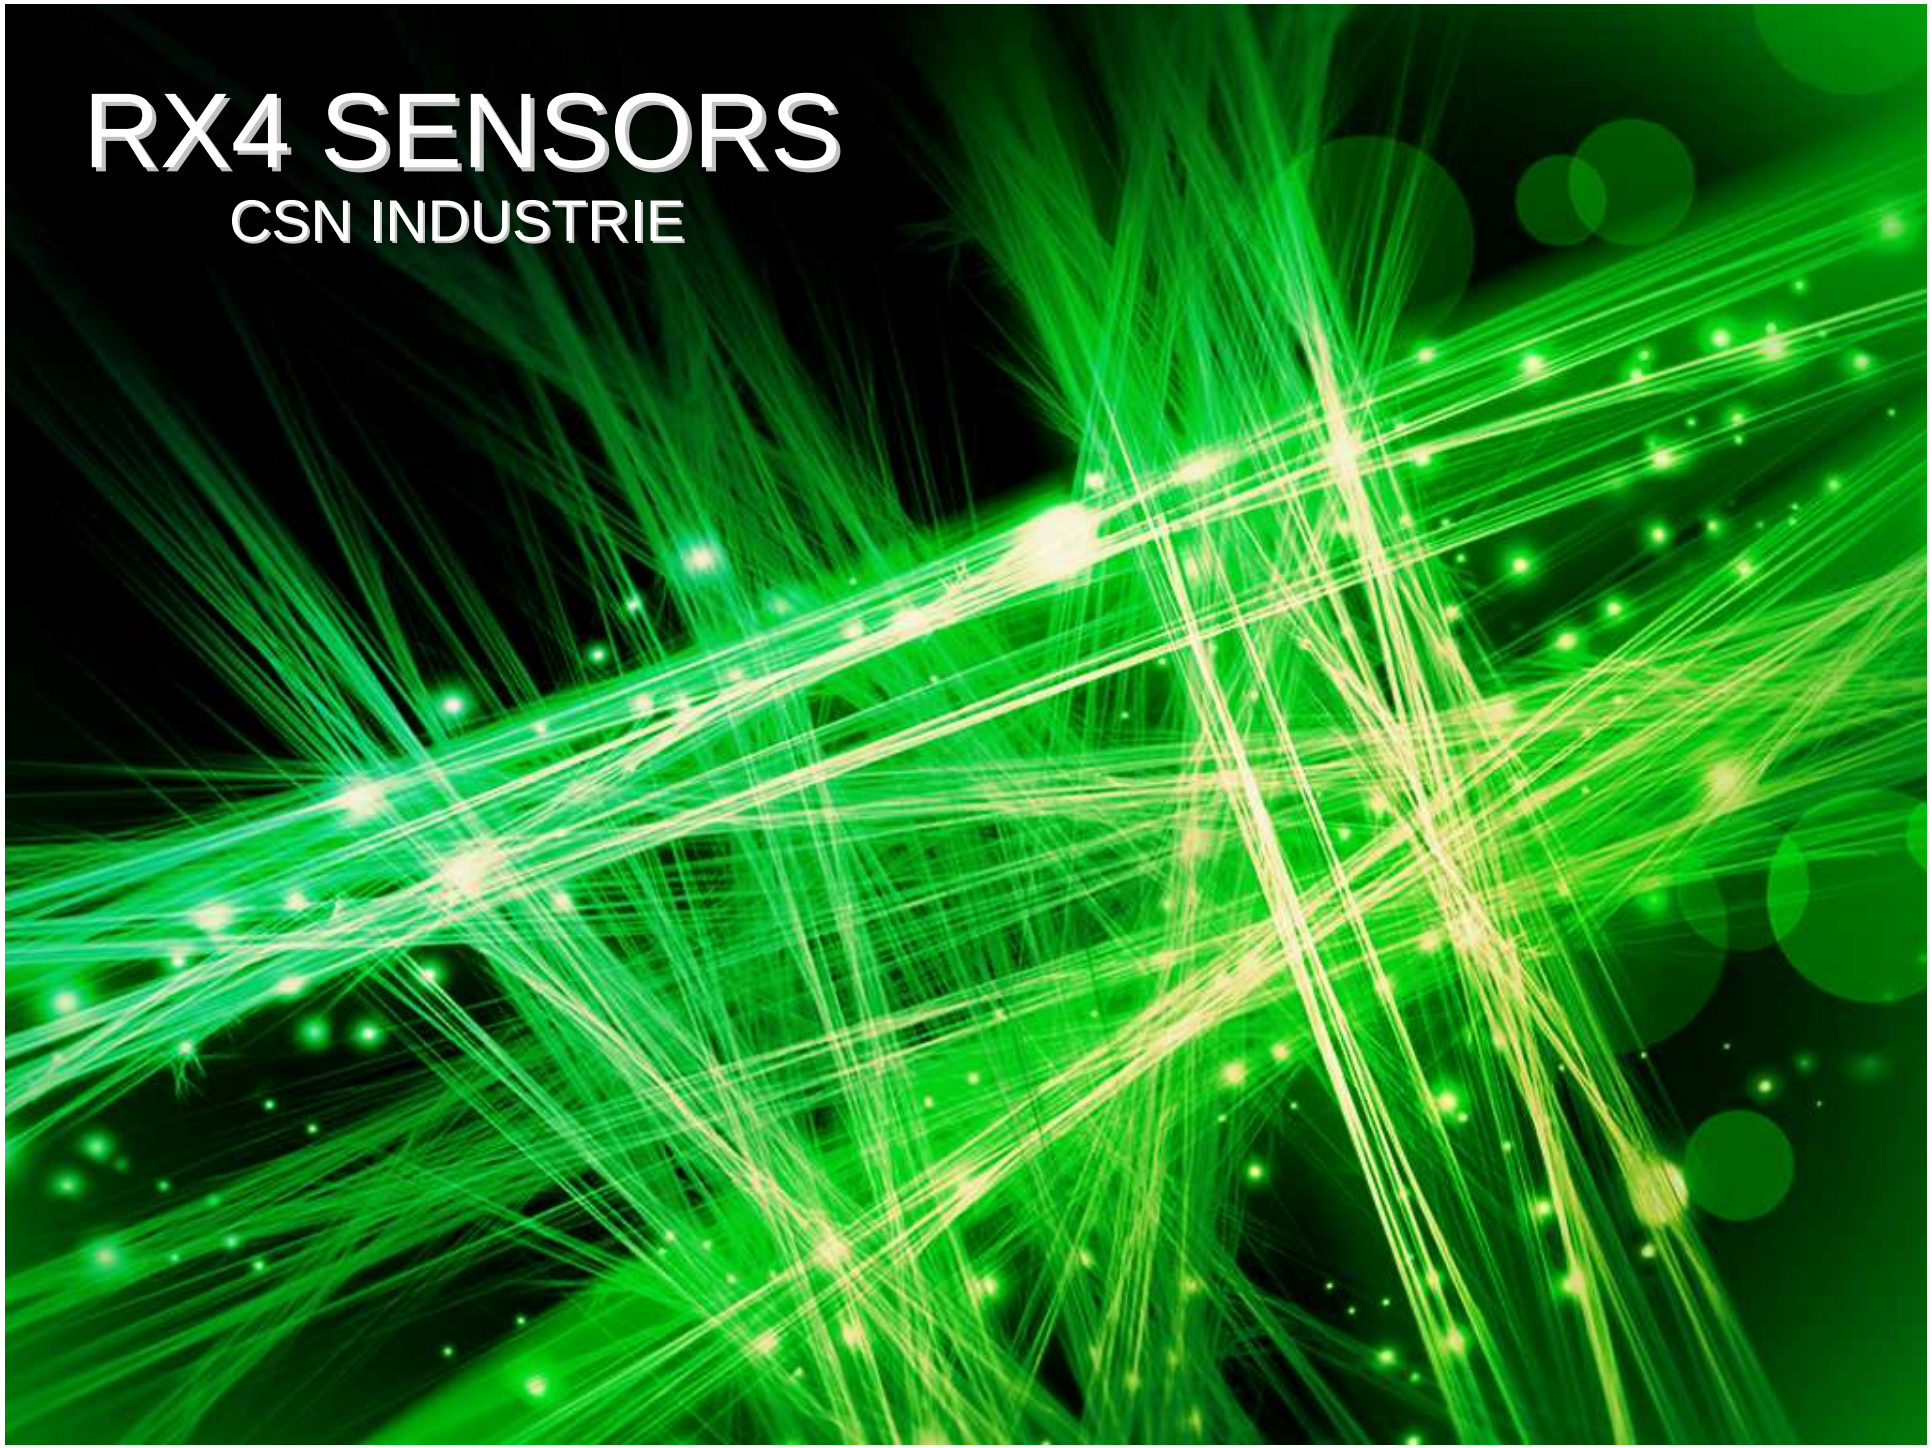
RX4 SENSORS
CSN INDUSTRIE

RX4 SENSORS

BE FREE TO CONNECT ….

CSN INDUSTRIE

NEW REVOLUTIONARY DIRECT CONNECTION TO THE PC

Rx4 is directly connected to the PC via USB.
No additional dock station, power supply or boxes are needed.
Rx4 is completely compatible with hi-speed USB ports (minimum USB2).
Rx4 cable is two meters long to fit every requested distance.

CSN INDUSTRIE

RX4 SENSORS

Cleaning, disinfection, sterilization day by day will not represent
a problem any more.
The riskproof RX4 is ermetic closed to prevent liquids filtration inside its body.
It will be possible to immerge it in non aggresive liquids as well as it is cleanable with wet towels.

WATERPROOF TECHNOLOGY

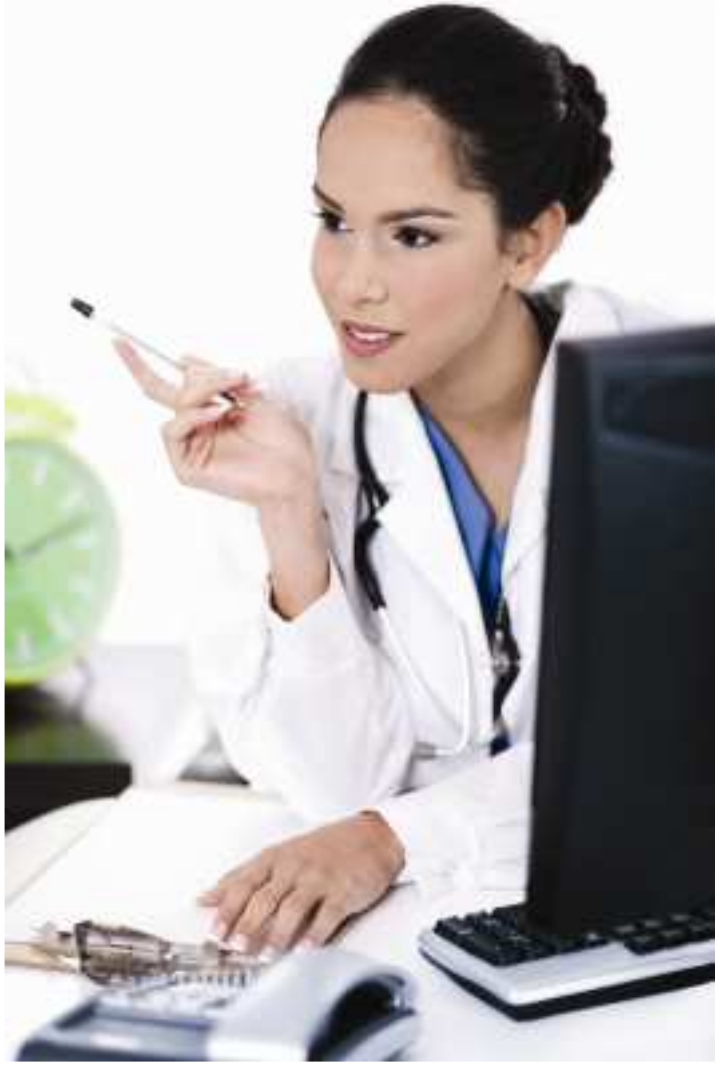

MULTI PLATFORM
PERFECT INVESTMENT

Rx4 Sensors are fully compatible with the most common Operating Systems to fit every informatic request.

Win7 (32 or 64 bit)
Win8 (32 or 64 bit)
Mac OSX coming soon

CSN INDUSTRIE

THE COMFORTABLE CHOICE

Rounded angles,
Ultra Flexibile wire
Mid-Body connection
and
Smooth shape
are RX4 trade-marks to guarantee comfort and satisfaction to patient in dental x-ray capture.

CSN INDUSTRIE

TOUCH EXPERIENCE

EASIEST WAY ...

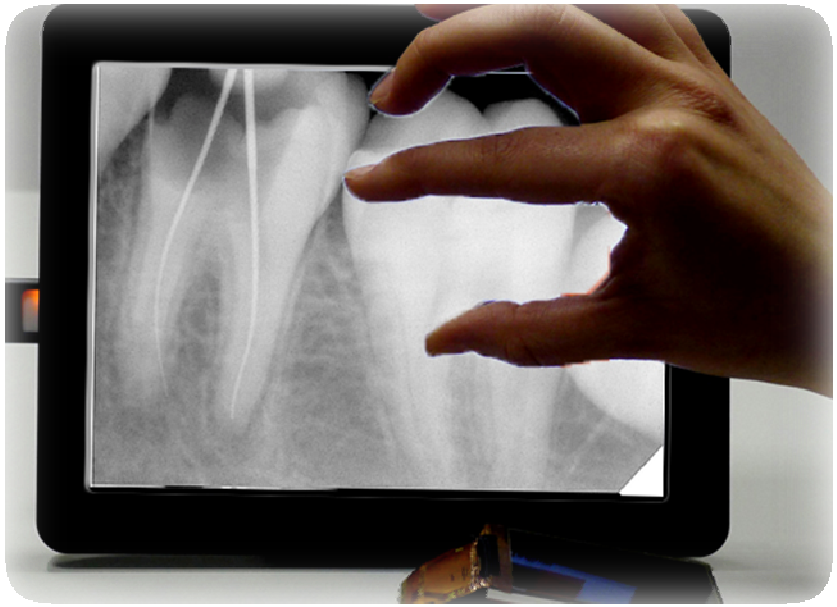

RX4 Sensors are managed by the revolutionary CSN OS Software.
It has been designed to fit all modern dental office requests and to be used in touch screen mode with windows based Pc tablets

CSN INDUSTRIE

RX4

TECHNOLOGY:	CMOS
SCINTILLATOR:	**CSI (cesium Iodide)**
ACTIVE AREA:	30X20 mm
NOMINAL RESOLUTION:	<28 L/P
REAL RESOLUTION:	**>20 L/P**
PIXEL SIZE:	<20 Microns
IMAGE DATA:	16 Bit
IMAGE FORMAT:	DICOM-BMP
SOFTWARE:	CSN OS/Image
CONNECTION:	USB2/3
CABLE LENGTH:	2 Meters
WARRANTY:	2 Years

RX4-GOS

TECHNOLOGY:	CMOS
SCINTILLATOR:	**GOS**
ACTIVE AREA:	30X20 mm
NOMINAL RESOLUTION:	<28 L/P
REAL RESOLUTION:	**18 L/P**
PIXEL SIZE:	<20 Microns
IMAGE DATA:	16 Bit
IMAGE FORMAT:	DICOM-BMP
SOFTWARE:	CSN OS/Image
CONNECTION:	USB2/3
CABLE LENGTH:	2 Meters
WARRANTY:	2 Years

RX4 SENSORS